




Green Pin® Heavy Duty Polar Bow Shackle with Safety Nut and Bolt Pin – GPPOLHD

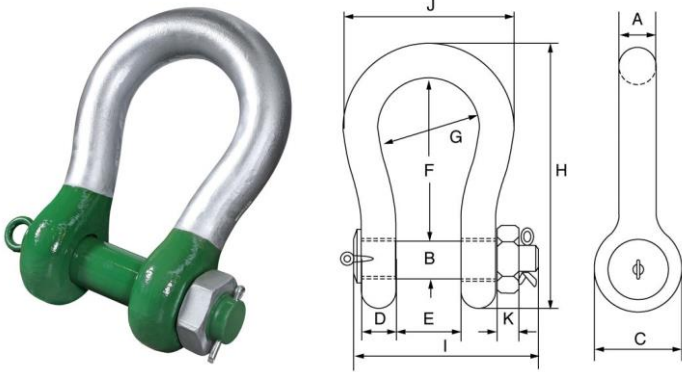

- Grade 8 alloy steel body and pin, quenched and tempered.
- Silver painted body and green painted pin.
- Conforms to ASME B30.26.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -40°C up to +200°C.
- CAD support on various sizes available upon request.
- Certification available **2.1** **3.1** **DoC** **LROS** **MPI** **US**

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	Specification
GPPOLHD120	120	95	95	215	89	144	381	238	667	440	416	50	110	Download
GPPOLHD150	150	105	108	245	100	165	400	275	702	490	485	60	160	Download
GPPOLHD200	200	120	130	288	110	175	500	290	854	520	530	60	235	Download
GPPOLHD250	250	130	140	299	118	205	554	305	904	560	565	65	285	Download

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical
--------------	--------	---	---	---	---	---	---	---	---	---	---	---	--------	-----------

	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	Specification
GPPOLHD300	300	140	150	325	123	205	618	305	996	575	585	70	340	Download	
GPPOLHD400	400	170	175	376	164	231	668	325	1114	690	665	70	560	-	
GPPOLHD500	500	180	185	398	164	256	718	350	1190	720	710	70	685	-	
GPPOLHD600	600	200	205	444	189	282	718	375	1243	810	775	70	880	-	
GPPOLHD700	700	210	215	454	204	308	718	400	1263	870	820	70	980	-	
GPPOLHD800	800	210	220	464	204	308	718	400	1270	870	820	70	1,100	-	
GPPOLHD900	900	220	230	485	215	328	718	420	1296	920	860	70	1,280	-	
GPPOLHD1000	1,000	240	240	515	215	349	718	420	1336	940	900	70	1,460	-	
GPPOLHD1250	1,250	260	270	585	230	369	768	450	1456	1025	970	70	1,990	-	
GPPOLHD1500	1,500	280	290	625	230	369	818	450	1556	1025	1010	70	2,400	-	